

Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as "Cypress" document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.


Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

www.infineon.com

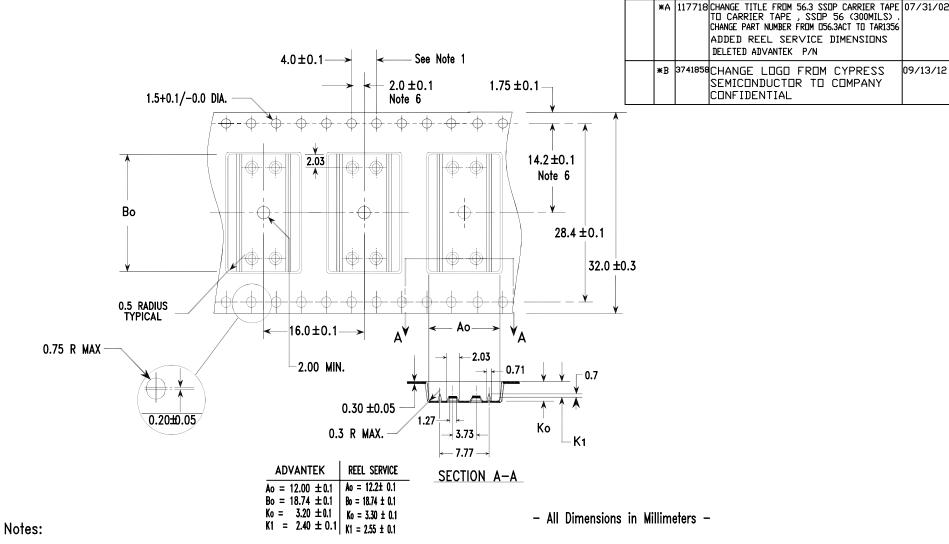

- 1. 10 sprocket hole pitch cumulative tolerance ± 0.2
- Camber not to exceed 1mm in 100mm
- Material: Conductive Black Polystyrene or equivalent
- 4. Ao and Bo measured on a plane 0.3mm above the bottom of the pocket
- 5. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- 6. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
- 7. All material to conform to EIA-541 and EIA-481 standard

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS		DESIGNED BY		DATE	7								
STANDARD TOLERANCES ON: DECIMALS ANGLES		DRAWN	XVC	DATE 09/13/12		CYPRE							
.xx ± .xxx ± .xxxx ±	±	СНК ВУ	ZJL	DATE 09/13/12	TITLE	COMPA		CONFI					
		APPROVED BY	PPROVED BY DATE CARRIER TAPE, SSUP56 (30						(300MIL	2)			
MATERIAL	SEE NOTES	APPROVED BY		DATE	SIZE	PART NO.	1	OWG NO			RE∨		
<u> </u>	SEE NUIES		KGL	09/13/12	Α	TAR1356	6		51-	51099	∗B		
FINISH					SCALE	1″=10mm				SHEET 1	OF 1		

REVISIONS

DESCRIPTION

NEW RELEASE

DATE

01/19/99

09/13/12

APPROVED

ZJL

ZONE REV ECN

** 60440